




厂名：合肥特达电气有限公司 厂址：安徽省合肥市神龙路2号 传真电话：0551-65568896
网址：www.hftddq2.com 邮箱：hftddq2@163.com

合肥特达电气有限公司高原型可分相控制 的接地高压真空接触器

HTD-JZQ-160~630-G-12KV 高原型可分相控制的接地高压真空接触器

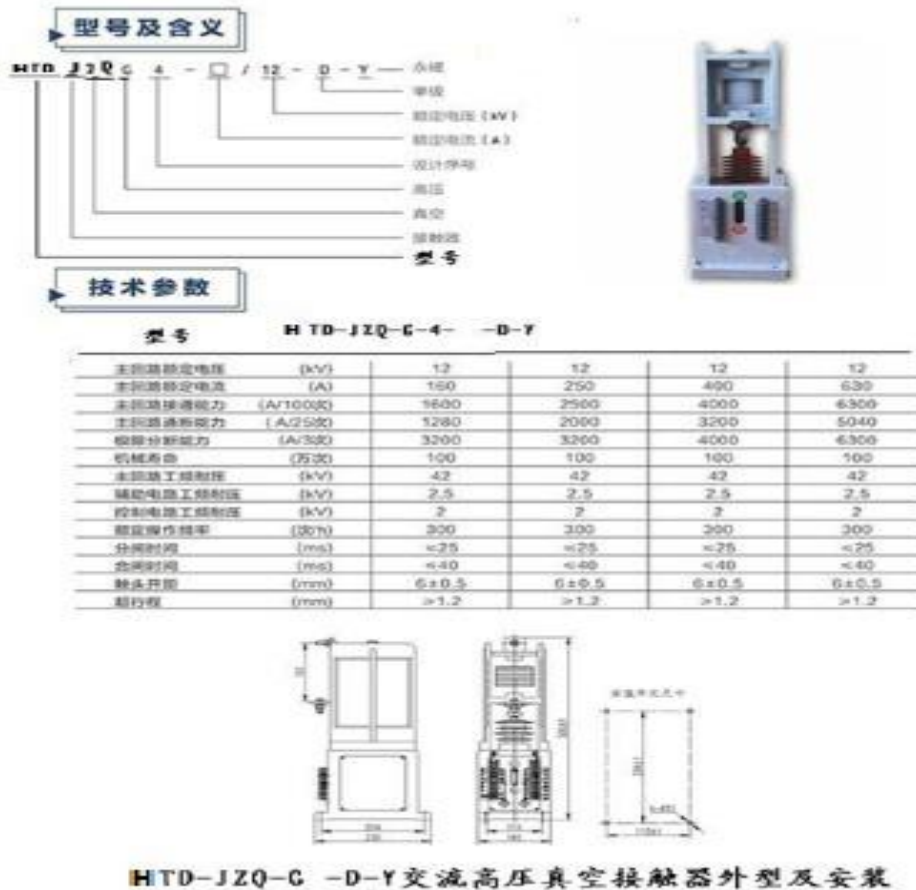

HTD-JZQ-160~630-G-12KV 高原型可分相控制的接地高压真空接触器



厂名：合肥特达电气有限公司
网址：www.hftddq2.com

厂址：安徽省合肥市神龙路 2 号
邮箱：hftddq2@163.com

传真电话：0551-65568896



型号		TD-JSQ-C 12KV			
主回路额定电压	(kV)	12	12	12	12
Main Circuit rated Voltage	(kV)				
主回路额定电流	(A)	360	250	400	630
Main Circuit rated current	(A)				
主回路接通能力	(A/10000)	1600	2500	4000	6300
Main Circuit Current making ability	(A/10000)				
主回路遮断能力	(A/2500)	1280	2000	3200	5000
Main Circuit break-make ability	(A/2500)				
短路分断能力	(A/100)	3200	4000	4500	6300
Maximum Break Ability	(A/100)				
机械寿命	(10 ⁵)	1,000,000	1,000,000	1,000,000	1,000,000
Mechanical Life	(10 ⁵)				
主回路工频耐压	(kV)	42	42	42	42
Power-frequency Withstand voltage for Main Circuit	(kV)				
辅助电路工频耐压	(kV)	2.5	2.5	2.5	2.5
Power-frequency Withstand voltage for Auxiliary Circuit	(kV)				
额定操作频率	(次/小时)	2	2	2	2
Rated Operate Frequency	(Ops/hr)				
分闸时间	(ms)	≤120	≤120	≤120	≤120
Opening Time	(ms)				
合闸时间	(ms)	≤150	≤150	≤150	≤150
Closing time	(ms)				
触头开距	(mm)	±120	±120	±120	±120
Contact Clearance Between Open Contacts	(mm)				
超行程	(mm)	±150	±150	±150	±150
Over Travel	(mm)				
		5±0.5	5±0.5	5±0.5	5±0.5